

Smart, Small and Flexible!

E12 Angle, Straight and Push-to-Start DC Electric Tools from Stanley



Lighter, Faster, More Powerful


- Torque range: 0.6 to 23 Nm (0.4 to 17 ft-lb)
- All models are under 2 lbs. and 1 ft long or less
- Push-to-Start Models include headlights
- Long life, lightweight cable has quick disconnect



QPM DC Electric Threaded Fastening Systems

QPM Threaded Fastening Systems Deliver Value Over Their Entire Lifecycle

- Any Stanley QPM Controller can operate tools from the entire range from < 1 to 2000 Nm
- Ethernet, DeviceNet, Profibus, 24V I/O and software options fit your plant interface requirements
- Stanley "Adaptive Tightening Control" technology improves quality by automatically adjusting for joint variability
- Programmable buttons provide process control options at the tool
- Fastening status LEDs, visible from either side of the tool, and a programmable buzzer signals the operator about assembly quality from pre-selected limits

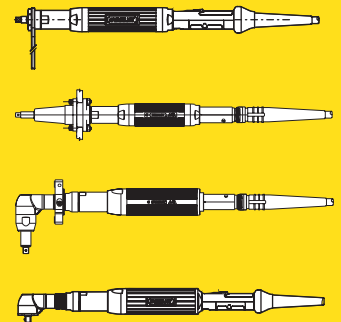

Models available
from 0.6 to 2000 Nm

STANLEY


Assembly Technologies

Contact Stanley today!

www.StanleyAssembly.com

Speed, Torque Level and Output Options Fit the Job


E12LA Angle Screwdrivers

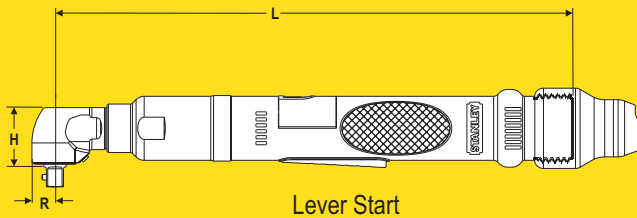

Lever Start

MODEL	Rated Speed	Rated Torque		"R" Side to Center		"H" Head Height		Length		Weight		Output	
	RPM	Nm	lb ft	mm	in	mm	in	mm	in	kg	lb	Standard	Options
E12LA10-4	2325	0.6 - 4	0.4 - 3	10	0.4	31	1.2	271	10.7	0.7	1.6	1/4" SD	3/8" SD
E12LA10-6	1490	2 - 6	1.3 - 4.4	10	0.4	31	1.2	285	11.2	0.8	1.7	1/4" SD	3/8" SD
E12LA13-10	1080	3 - 10	2.2 - 7.4	13	0.5	34	1.3	287	11.3	0.8	1.7	3/8" SD	
E12LA13-14	850	4 - 14	3 - 10	13	0.5	34	1.3	287	11.3	0.8	1.7	3/8" SD	
E12LA13-18	590	5.5 - 18	4 - 13	13	0.5	34	1.3	287	11.3	0.8	1.7	3/8" SD	
E12LA14-23	600	7 - 23	5 - 17	14	0.55	35	1.4	297	11.7	0.8	1.9	3/8" SD	

E12LB Screwdrivers

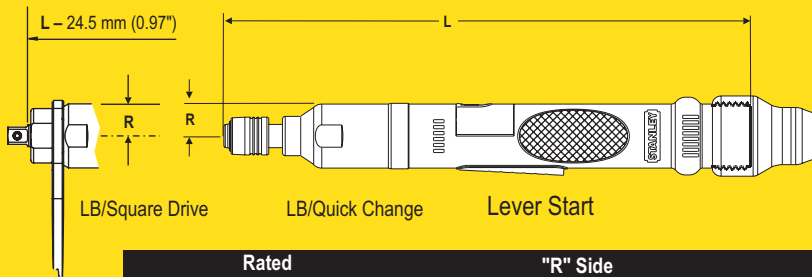


LB/Square Drive

LB/Quick Change

Lever Start

MODEL	Rated Speed	Torque Range		"R" Side to Center		Length		Weight		Output		
	RPM	Nm	lb ft	mm	in	mm	in	kg	lb	Standard	Options	
E12LB-4	2535	0.6 - 4	0.4 - 3	21	0.83	282	11.1	0.7	1.5	1/4" QC	1/4" SD	3/8" SD
E12LB-6	1620	2 - 6	1.3 - 4.4	21	0.83	296	11.7	0.7	1.5	1/4" QC	1/4" SD	3/8" SD
E12LB-10	1280	3 - 10	2.2 - 7.4	21	0.83	296	11.7	0.7	1.5	1/4" QC	1/4" SD	3/8" SD
E12LB-13	880	4 - 13	3 - 9.5	21	0.83	296	11.7	0.7	1.5	1/4" QC	3/8" SD	
E12LB-17	610	5 - 17	4 - 12.5	21	0.83	296	11.7	0.7	1.5	1/4" QC	3/8" SD	

E12LP Push to Start Screwdrivers

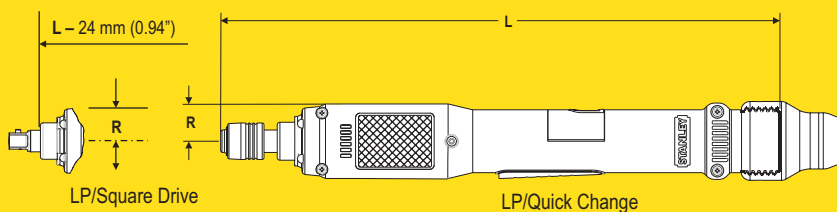

LP/Square Drive

LP/Quick Change

Includes Headlights; Start options include Push to Start, Lever or Both

MODEL	Rated Speed	Torque Range		"R" Side to Center		Length		Weight		Output		
	RPM	Nm	lb ft	mm	in	mm	in	kg	lb	Standard	Options	
E12LP-4	2535	0.6 - 4	0.4 - 3	21	0.83	315	12.4	0.7	1.6	1/4" QC	1/4" SD	3/8" SD
E12LP-6	1620	2 - 6	1.3 - 4.4	21	0.83	315	12.4	0.7	1.6	1/4" QC	1/4" SD	3/8" SD
E12LP-10	1280	3 - 10	2.2 - 7.4	21	0.83	315	12.4	0.7	1.6	1/4" QC	1/4" SD	3/8" SD
E12LP-13	880	4 - 13	3 - 9.5	21	0.83	315	12.4	0.7	1.6	1/4" QC	3/8" SD	
E12LP-17	610	5 - 17	4 - 12.5	21	0.83	315	12.4	0.7	1.6	1/4" QC	3/8" SD	

Contact Stanley today!

www.StanleyAssembly.com